


PRODUCT CATALOG

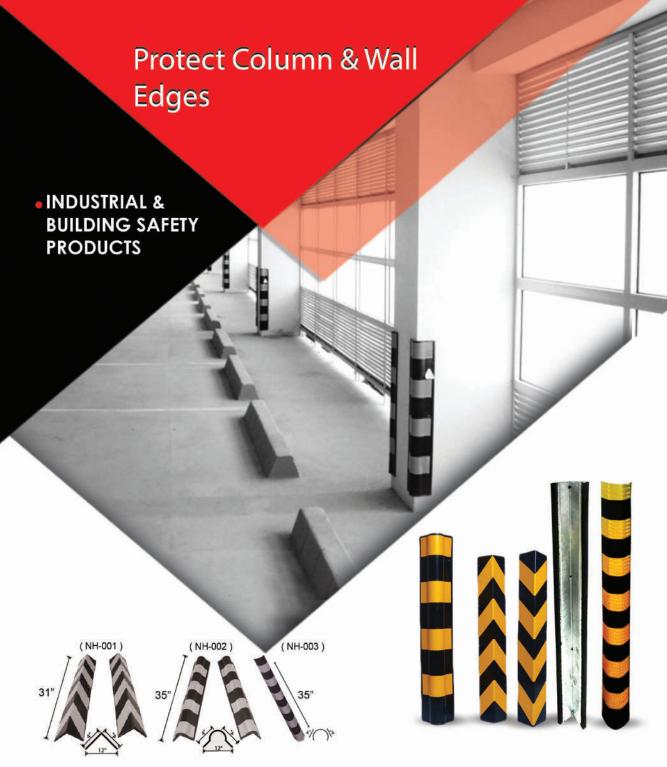

The rubber compound makes a perfect protector of columns and corners because it is inexpensive and easy to maintain. The rubber will not warp, crack, chip or rot.

Quick Installation - Corner Protectors are installed using screws or epoxy adhesive (not supplied) onto concrete or steel columns. They are lightweight, easy to handle and can easily be installed by one person.

Yellow Delineation - Our Corner Protectors have yellow reflective strips making the corner and the protector clearly visible to motorists and pedestrians both day and night.



All Size of Rubber Column Guard

Model No.	Shape	Length	Width	Thickness	Weight
∧ NH-001	Arrow Shape	35" Approx	4"x4" Approx	10-12mm	2.6 Kg
↑ NH-002	D. Shape	40" Approx	4"x4" Approx	10-12mm	2.8 Kg

You can order customize design or size.



Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2,

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.


Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712





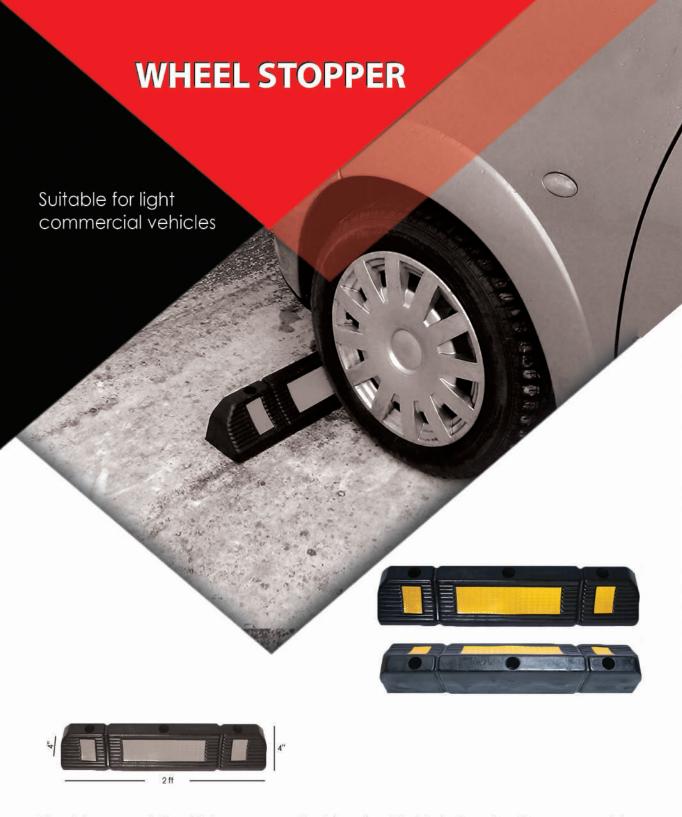

Wheel stopper are designed to improve car park safety and are ideal for both small and large commercial car parks or even a residential parking area. Our rubber wheel stopper are the preferred choice of industrial sites, retail parks, hospitals, car park operators and commercial.

- Prevents damage to property and protects pedestrian walkways
- Reflective tape is molded, for increased visibility






Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712



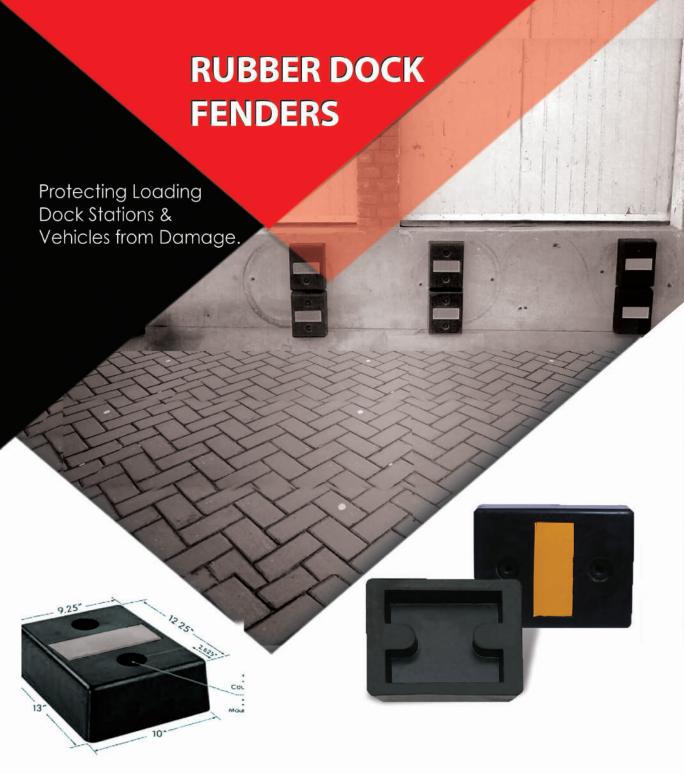

We offer a comprehensive range of moulded and extruded marine rubber fenders which are cost effective and efficient solutions to suit any operating environment, condition and requirement. The principle purpose of a rubber fender system is to protect the hull and berthing facility from damage when vessels berth alongside. The fender functions as a shock absorber by absorbing the berthing energy of a vessel on berthing facility.

- Standard Rubber Dock fenders
- Extra-length loading Rubber Dock fenders
- Extra-thick loading Rubber Dock fenders






Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712







Prevent those little bumps from turning into big damage with a rubber wall guard. This simple addition absorbs and minimize damage when a heavy or light vehicle accidentally contacts a wall. The wall guard is resistant to water, oil, UV light, and extreme temperatures, so it can be used indoors or outdoors, in commercial or retail areas, parking structures, warehouse, industries or even a home garage.

- The wheel when set against the rubber chocks experiences the flexibility
- Unique capability of rubber chokes is possible due the equilateral round shape
- Distinct internal design of the product





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk Islamabad: +92 310 3502712







Speed Bumps and Humps are an easy way to deter excessive speed. We offers various types of speed bumps and road humps that will slow down traffic and offer pedestrians more security as they walk from their cars to their jobs.

- Includes all mid-sections, end-caps and fixings
- Ideal for Residential and Commercial areas
- Highly Durable
- Quick and Easy Install





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factoria

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.



+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712



Interlocking rubber flooring can be installed easily over nearly any smooth surface including concrete, asphalt, wood or tile. No special tools are required. The unique tab design holds the tiles together securely without the need of expensive adhesives, tapes or the labor to apply them

Usage:

Gym, office, factories, hospitals, hotels, laboratories, laundries, bathroom, shops, supermarkets and skating rinks all have one thing in common – the need to provide a safe and comfortable medium for user. Interlocking rubber flooring can be installed easily over nearly any smooth surface including concrete, asphalt, wood or tile. No special tools are required. The unique tab design holds the tiles together securely without the need of expensive adhesives, tapes or the labor to apply them

- Good energy absorption.
- Reliable performance
- Durable standards
- Choose color options.
- Coin Texture mat non-slip surface.
- Floor protection.





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712







Household Matting for an innumerable amount of applications. Our matting solutions which promotes safety, comfort, cleanliness and helps protect and extend flooring life.

Category: Industrial & Building Floor Products





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.


Lahore:


+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712







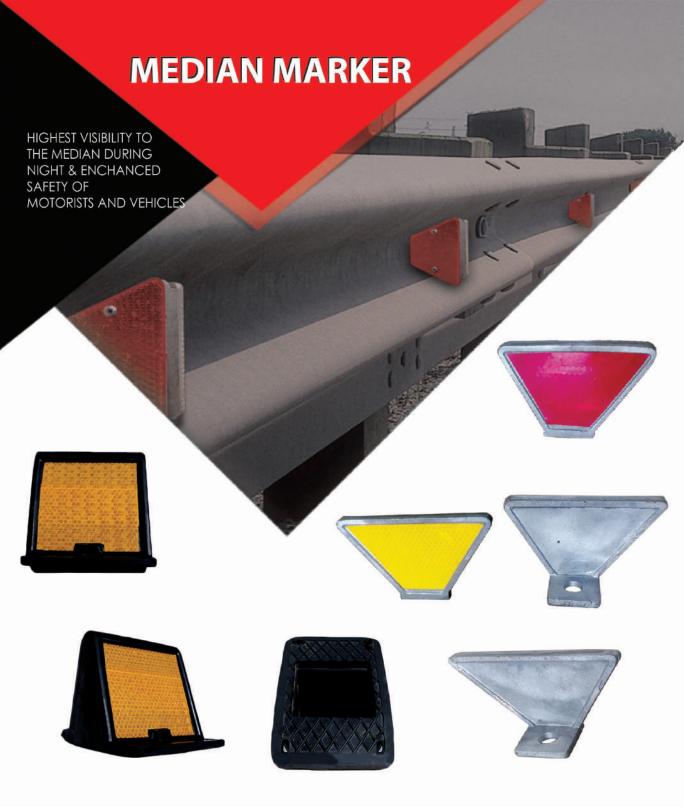

Median Marker is Made of tough, impact resistant rubber and casting body, reflectorized on either sided using fluorescent yellow prismatic sheeting is a highly durable reflective product for medians.

- Highly durable
- It can withstand climatic changes and very high impact
- UV resistant





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712





Protector®

Bridge Expansion Rubber Joints

- Motorways
- Road Bridges






Rubber bridge expansion joints are mainly made of rubber, steel plate and angle iron. Steel plates are set in the rubber bridge expansion to strengthen the bearing capacity and they can slide freely along the angle iron to meet the expansion deformation of main grid.

Because of the excellent sealability and shock-absorbing effect of rubber, rubber bridge expansion joints do well in proofing water and reducing noise. The elasticity of rubber plates and its shear deformation in the telescopic channel helps the whole device to realize telescopic motion.

Features

Rubber bridge expansion joints made of prime-quality rubber are anti-aging and have a long service life. Being wear-resistant, this product can withstand reiteration function of vehicle load. During installation, bolt holes on the bottom and each junction are filled with adhesion agent which makes the whole rubber bridge expansion joints highly water-resistant.





Typical cross section through the fitted joint



Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.


Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.



+92 331 4418990 | lahore@nhenterprises.pk Islamabad: +92 310 3502712









Lane Dividers are designed to perform a wide variety of traffic management purposes like indicating lane separation, cycle lanes, parking bays, and tramways. They also mark traffic lanes in car park entrances and exit ramps and protect tunnel walls from possible vehicle impact damage. When used with optional reflective panels, they are ideal for low light areas such as underground passages.





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.


Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712





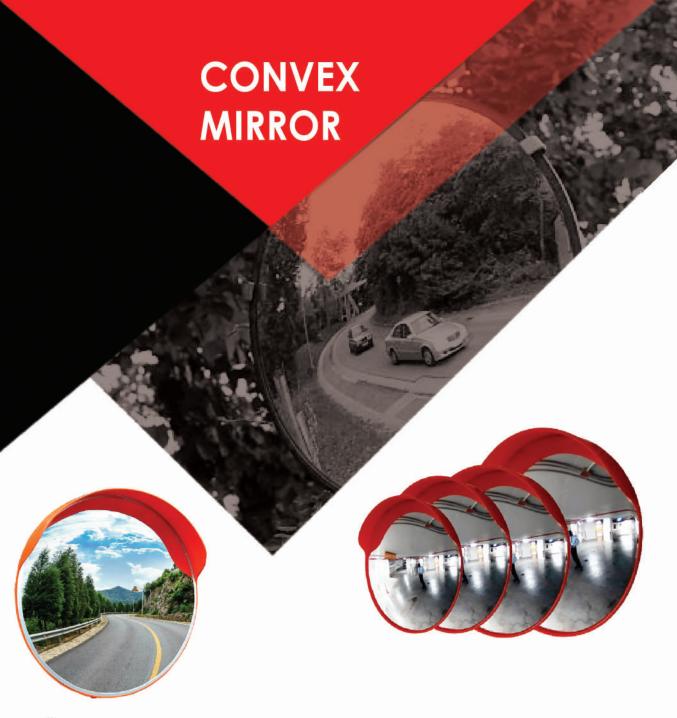

Convex Mirrors used inside buildings: Large offices, stores, and hospitals use a convex mirror to let people see around the corner so that they can avoid running into each other and prevent any collision.

Convex mirror used in vehicles: Convex mirrors are commonly used as rear-view mirrors in case of automobiles and vehicles because it can diverge light beams and make virtual images.

Uses of the convex mirror in a magnifying glass: These mirrors are mostly used for making magnifying glasses. In industries, to construct a magnifying glass, two convex mirrors are placed back to back.

Convex mirrors used for security purposes: Diverging mirrors are also used for security purposes in many places. They are places near ATMs so that bank customers can check if someone is behind them.

Available in sizes

- 18"
- 24"
- 32"
- 40"






Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.


Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712





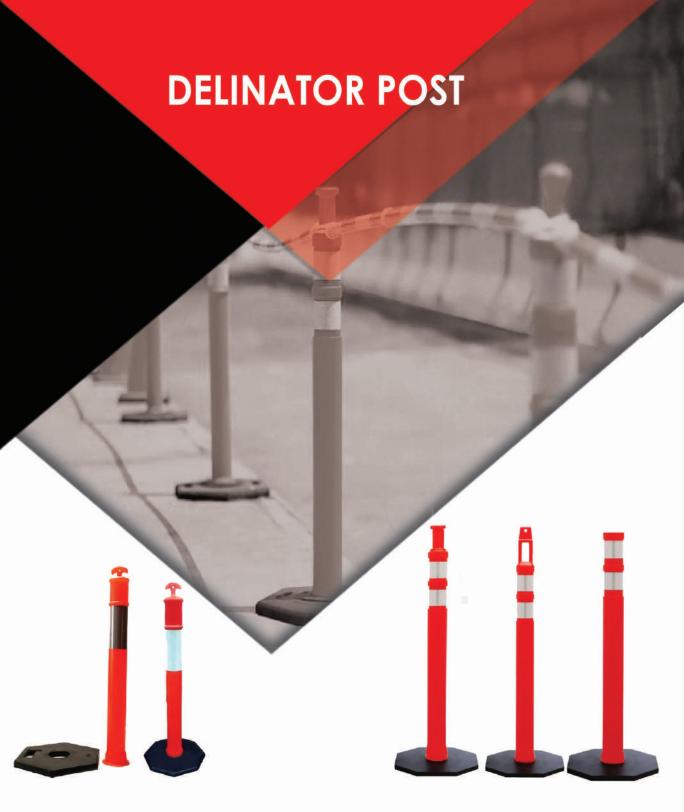

PVC with Rubber base delineator posts feature a flexible, rugged design, allowing them to return upright after impact. They are ideal for parking lots, pedestrian walkways, and temporary work zones. Polyethylene delineator posts have molded handles for easy movement. Each post also has high-intensity prismatic collars

Available size 44" height
Base weight 3 kgs approx
Neck available for chain and rope for used as barrier post
Multi function product
Available with refection tape for night vision





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712







The Plastic Jersey Barriers can be accessorized to be used as a barrier wall and to securely mount warning flags, steady burning lights, or flashing lights for increased visibility. Colors include high visibility orange and white.

Composition: 100% Polyethylene 77"x16"x23" Dimension:

15-16 Kgs (Empty) Weight:

200 Kgs (With Water)

350 Kgs (With Sand)

Red and White Color:








Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.


Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.



+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712



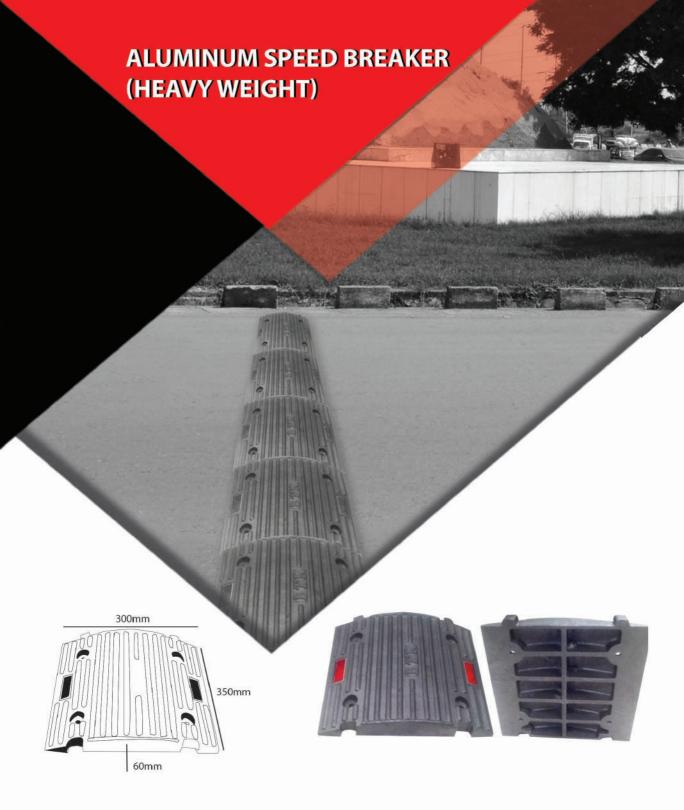

N.H Enterprises

Aluminum Casting Laminated with 3m media Finished with superior polish

Installation Procedures:

Four holes with L.T machine and pour epoxy fixed with rawal bolt



Dimensions:

Length 300mm Width 350mm Height 60mm Weight 8.5kg





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2,


Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.

Lahore:

+92 331 4418990 | lahore@nhenterprises.pk Islamabad: +92 310 3502712





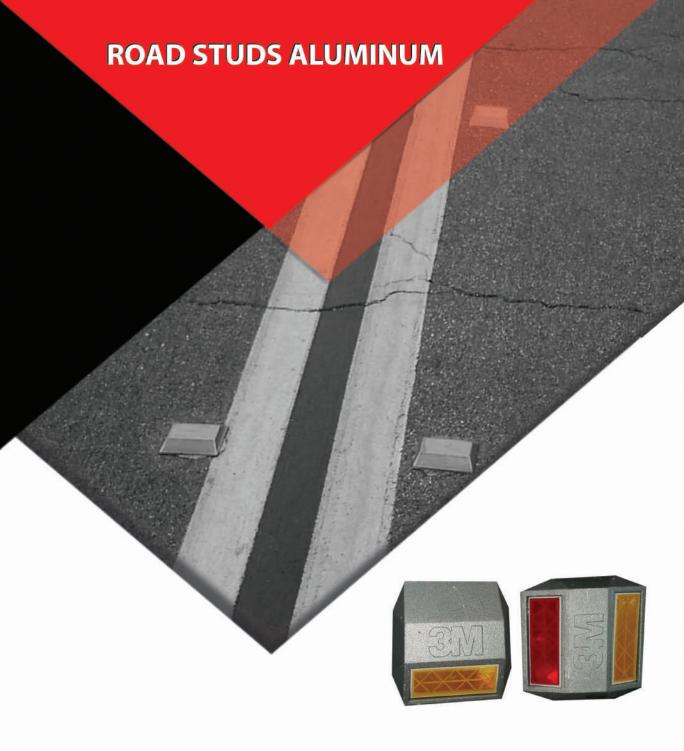

Aluminum Casting Two Steel Spikes Laminated with 3m media Finished with superior polish

Installation Procedures:

I tole with L.T machine pour epoxy in it press it

Dimensions:

Length: 218mm Width: 106mm Height: 45mm Weight: licg



Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712





Aluminum Casting
Two Steel Spikes
Laminated with 3m media
Finished with superior polish

Installation Procedures:

I tole with L.T machine pour epoxy in it press it

Dimensions:

Length: 218mm Width: 106mm Height: 45mm Weight: licg






Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712







Aluminum Casting Two Steel spikes Laminated with 3m media Finished with superior polish

Installation Procedures:

Holes with L.T machine P Pour epoxy in it and press it.

Dimensions:

Length 145mm Width 95mm Height 45mm Weight 0.750kg






Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.

Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712

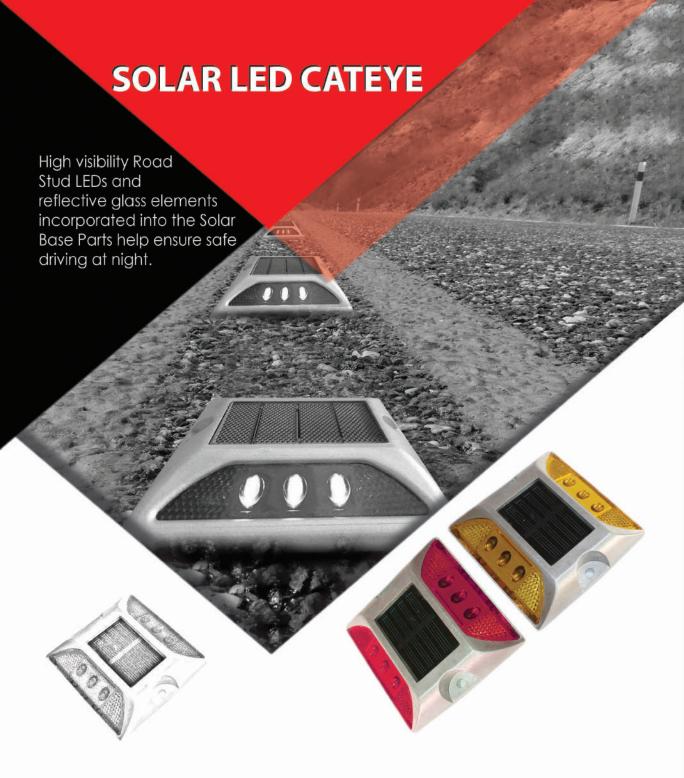

High visibility Road Stud LEDs and reflective glass elements incorporated into the Solar Base Parts help ensure safe driving at night. The Solar Base Parts are solar powered, allowing them to be used in remote or stand alone applications. High performance Nickel-Metal Hydride Battery along with completely waterproof packaging ensures maintenance-free, Only clean solar energy is used; there are no hazardous materials in the products.








Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712









Tyre Killers are an effective one-way traffic control product, improved with the traffic calming effect of a speed ramp. Comprised of a simple and reliable, vehicle operated mechanical system they are quick and easy to install onto concrete and most asphalt road surfaces with no excavation required.





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi. Lahore:

+92 331 4418990 | lahore@nhenterprises.pk Islamabad: +92 310 3502712







Neoprene Pads have no moveable parts and thermal expansion and contraction absorbed by the pad's ability to give and take in shear. There is no sliding between pad and



Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2,

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.



beam or between pad and abutment.

+92 331 4418990 | lahore@nhenterprises.pk Islamabad: +92 310 3502712

+92 345 2340752 | islamabad@nhenterprises.pk







or steel



For Cars, Suvs, Heavy and Mini Trucks

Wheel chocks help prevent vehicles and equipment from accidentally moving during loading and unloading of cargo. Wheel chocks are contoured to fit vehicle tires and prevent any possible slippage.

- Heavy-duty rubber wheel chocks
- Standard rubber wheel chocks









Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.



Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712



Aluminum Casting
Laminated with 3m media
Finished with superior polish

Installation Procedures:

Holes with L.T machine P Pour epoxy in it and press it.

Dimensions:

Length 385mm Width 1.5mm Height 55mm Weight 4kg each pair





Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.



+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712







Karachi Address: Ground Floor, Zohra Building, P.E.C.H.S. Block-2, Karachi.

Factory Address: B-36, Irshad Qadri Road, S.I.T.E., Karachi.

Lahore:

+92 331 4418990 | lahore@nhenterprises.pk

Islamabad: +92 310 3502712



